

IMPORTANT NOTE:

Luminaire must be installed and grounded in accordance with the National Electrical Code (NEC) and local codes. All conduit entries must be sealed from moisture. Use appropriate sealing material on conduit fittings and conduit closure plugs.


Luminaire is wet location listed and suitable for mounting in-grade.

Suitable for all types of construction including poured concrete construction and in-soil construction.

WARNING: Debris must be kept clear from top and interior of in-grade fixtures. Excessive heat could occur that may create a fire hazard and/ or harm the fixture components. Specific attention must be made to never install in-grade fixtures in mulch, wood chips, or other potentially ignitable materials. Failure to do so will void warranty and may result in serious injury and/or damage the fixture and/or property.

MAINTENANCE: To assure proper orientation and efficiency and to prevent luminaire overheating, lens must be kept clear of debris, dirt, leaves, trash and mineral deposits from water. A regular schedule maintenance program is recommended.

NOTE: Save these instructions for future reference.

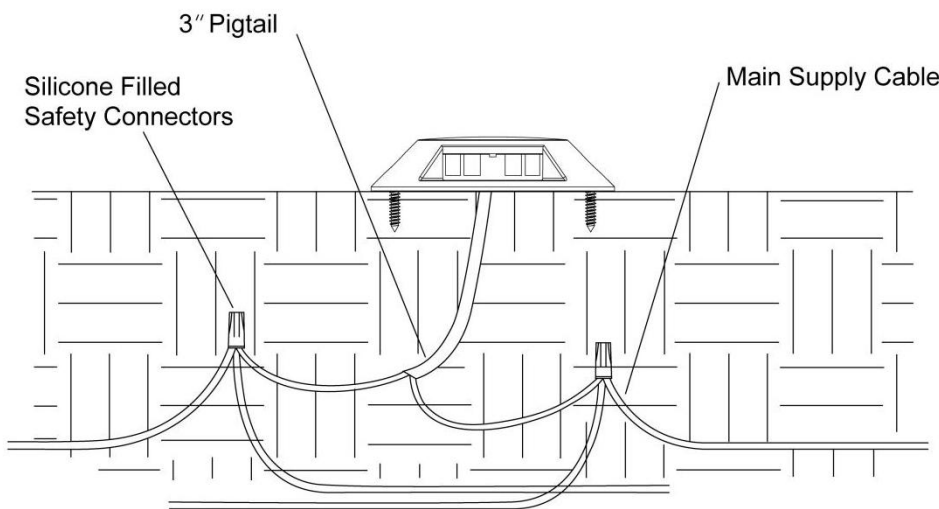

Installation Steps

Step 1: Select a flat, stable location with good drainage.

Step 2: Strip the two (2) leads from the luminaire pigtail wire. Using the two (2) silicone filled safety connectors (excluded), connect the leads from the luminaire to the main supply cable leads.

Step 3: Turn on the low-voltage transformer. Verify that the fixture illuminates properly.

Note: Luminaires are supplied with 18-2 cable pigtail for secure

connection to the main low voltage cable. The fixture supply cable is to be protected by routing in close proximity to the luminaire. The main low voltage cable is intended for shallow burial – less than 6 inches (152 mm), Only use a main low voltage cable of the type specified in the National Electric Code or Canadian Electric Code for landscape lighting applications. If in doubt, check with your local electric authority.

Maintenance

- ✧ The GEN3-40C LED module is integrated and non-replaceable.
- ✧ Clean the lens periodically with a soft cloth to maintain optimal light output.
- ✧ Inspect wiring connections annually to ensure waterproof integrity.
- ✧ If the fixture does not light, check transformer output, wiring polarity, and connector condition.

WARNING: TO REDUCE THE RISK OF FIRE, OR INJURY TO PERSONS:

- ✧ Lighted Lamp is HOT. Lamp is hot when illuminated; do not touch when lamp is on.
- ✧ Turn off/unplug electrical power before modifying the lighting system
- ✧ Lamps get HOT quickly! Contact only switch/plug when turning on
- ✧ Do not touch hot lens, guard, or enclosure
- ✧ Keep away from potential flammable materials, structures and/or landscapes.
- ✧ Do not touch the lamp directly at any time. Use a soft cloth. Oil from skin may damage lamp.
- ✧ Do not operate fixture if cover, fitting and/or shield is damaged or missing.

**FOR OUTDOOR USE ONLY
SAVE THESE INSTRUCTIONS**