

Sole ultra mini Spot TGL6034

1W Adjustable Recessed Downlight

Description


Downlight for indoor use;
IP21;
Mini Design;

Finish

White/Black/Bronze

Material

Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Osram 3030 SSL150-3V 350mA

Output (W): 1W (350mA 3V)

Total power consumption (W): 1W

Color temperature: 2700K

CRI: >90

Photobiological risk: RG1

Real Lumen: 88.5lm

Qty Leds: 1

Lm/Real W: 88.5lm

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR: <19

Gear

This product is supplied with gear.

Remote LED Triac dimmable led driver



SE-6-700-G1T 700mA 2-9Vdc

OK to Parallel wires 2pcs fitting

Luminaire

Crossing: No

Warranty: 5 Years

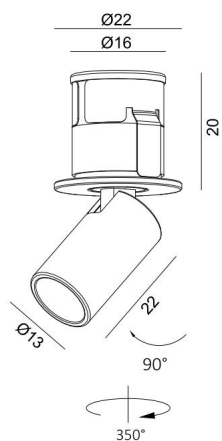

↻ 17mm
⚡ 5-25mm

LIGHT DISTRIBUTION for 2700K Middle 36° 1W

h(m)	E(lx)	Ø(m)
1	176.02	Ø0.55
2	43.99	Ø1.10
3	19.55	Ø1.65
4	11.00	Ø2.20
5	7.04	Ø2.75



The photograph may not match the reference exactly. Please read the product description to identify the finish.